

Dur-A-Lift DCP-36 Cable

Dur-A-Lift DCP-36 Cable Placer

- Telescopic Articulated Cable Placer
- Non-Insulated
- Hot-Dipped, Galvanized Basket
- 400# of Side Pull
- 50# of Down Pull
- Fairleads for Cable Lashing
- Direct Communication Between Operator & Driver
- Operate in Stationary & Mobile Modes
- Max Working Height: 41'
- Max Side Reach: 26' 6"

Dur-A-Lift DCP-36

- 41' Working Height
- 350 LB Basket Capacity
- Non-Insulated

Dodge / Ford F550 4x4 Chassis

- Diesel Engine
- Knapheide Service Body
- Safety Lighting

Additional Options Available Upon Request



Dur-A-Lift's rugged cable placer unit is capable of withstanding the harsh applications of mobile operation. The smooth, easy to operate control system is packed with behind the scenes safety elements.

DCP-36 Detailed Specifications:

DCP-36 Cable Placer

- Operate in stationary and mobile mode
- Steel extension boom
- 24" x 30" x 42" steel galvanized basket with Fairleads
- Yoke end mounted walk-in basket with door
- 370° hydraulic limit, non-continuous rotation
- Dual cross over relief reduces rotation overloads
- Hydraulic leveled basket
- 4 Function Joystick
- Pistol grip lower remote control-boom functions, lower stow, start/stop, two speed
- Single-hand upper control joystick
- Upper and lower basket to cab intercom communication system
- 110 volt outlet at basket
- Open center hydraulic system
- Working Height - 41'
- Side Reach - 26' 6"
- Stowed Travel Height - 10' 1"
- DC Backup

Bed Options:

- Knapheide 6131D54 Service Body
 - Body Material - 14 ga A40
 - Streetside & Curbside Compartments
 - Adjustable Shelves w/ Dividers
 - 30"x94" Tailshelf, Steel Walkup w/Aluminum Pole Handles, 10" Belting Step
 - (8) Compartment LED Light kit
 - (4) Work Light LED 4" (Cargo Area, Rear Components)
 - Wheel Chock Holder

Hydraulic Items:

- PTO/Pump Chelsa 6.7L Diesel
- Wire Braid Pressure Hose and Fitting Below Rotation
- Inverter, Xantrax X-Power 3000 W
- Levleride Torsion Bar Kit
- Timbren Load Booster
- Ladder Rack, Quick Lock Aluminum

Additional Items:

- Mud Flaps
- Fire Extinguisher 10 lb
- Backup Alarm
- Wheel Chock w/ Eyebolt
- Triangle Reflector Kit
- (2) 4' Clear/Amber Strobes (Rear Tailshelf)
- (1) Strobe Rotating Amber
- (2) Strobe Cl/Amber (Front Gill)

DCP-36

Telescopic articulated cable placer

DUR-A-LIFT®



SPECIFICATIONS

DCP-36

WORKING HEIGHT	41'
SIDE REACH	26'6"
APPROX. STOWED TRAVEL HEIGHT	10'1"
HEIGHT TO BOTTOM OF PLATFORM	36'
BASKET CAPACITY	350#
APPROX. LIFT WEIGHT	2675#
MAIN BOOM TRAVEL	-25° to 75°
ARTICULATING ARM TRAVEL	-6° to 83°
EXTENSION TRAVEL	110.5"
SIDE PULL	400#
DOWN PULL	50#

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.

WORKING HEIGHT UP TO 41'; SIDE REACH TO 26'6" ☐

400# SIDE PULL; 50# DOWN PULL ☐

FAIRLEADS FOR CABLE LASHING ☐

DIRECT COMMUNICATION BETWEEN OPERATOR AND DRIVER ☐

OPERATES IN MOBILE OR STATIONARY MODE ☐



DUR-A-LIFT®

WE SPEAK BUCKET TRUCK

DCP-36


Telescopic articulated cable placer

DUR-A-LIFT
WE SPEAK BUCKET TRUCK



WWW.DUR-A-LIFT.COM

REACH DIAGRAM

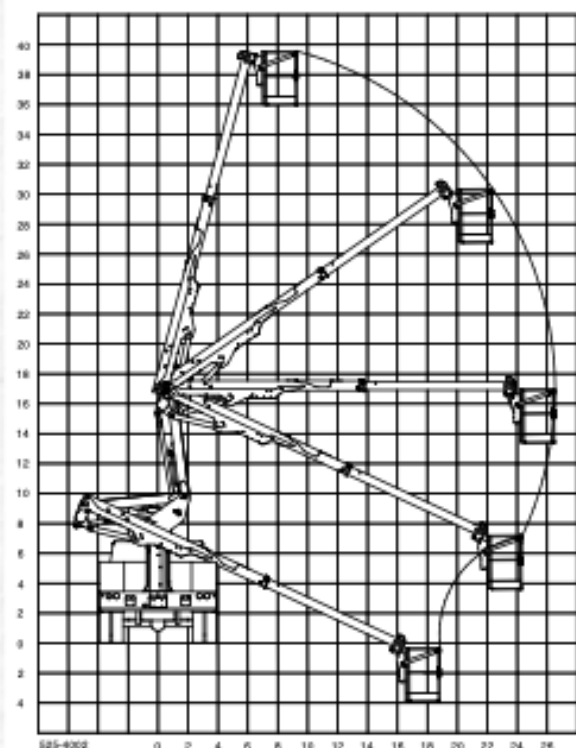


Tons of storage options specially designed for those in the telecom and utilities industries.

STANDARD

Operates in stationary and mobile mode; steel extension boom; 24" x 30" x 42" steel galvanized basket with fairleads; yoke end-mounted walk-in basket with door; 370° hydraulic limit, non-continuous rotation; dual cross over relief reduces rotation overloads; hydraulic leveled basket; pistol-grip lower remote control-boom functions, lower stow, start/stop, two speed; single-hand upper control joystick; upper and lower basket to cab intercom communication system; 110 volt outlet at basket; open-center hydraulic system

Dur-A-Lift's rugged cable placer unit is capable of withstanding the harsh applications of mobile operation. The smooth, easy to operate control system is packed with behind the scenes safety elements.

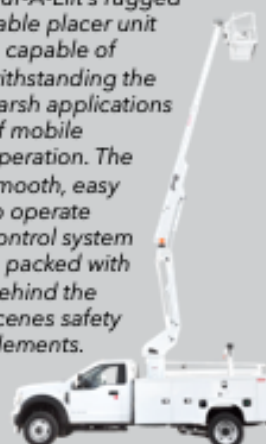

READ MORE

CHASSIS REQUIREMENT, MIN.: 15,000 GVWR
CHASSIS CAB TO AXLE REQUIREMENT, MIN.: 84"

