



## THE CONNER GROUP

AUGERS / BUCKETS / HD DRILLS / SPLICING / COW

### Unit Specifications

#### Brindle RL5RTWF

5-REEL Trailer



### Trailer Specifications

- Overall Length: 45'
- Stabilizing Front Jack: 12,000lbs
- Stabilizing Rear Jack: (2) 12,000lbs
- Max Reel Width: 77"
- Max Reel Height: (5) 96" Reels or (4) 120" Reels
- Reel Bars: 3" w/ Collars




### Vehicle Specifications

- Chassis: CLASS 7
- Axles: Tri-Axle
- GVWR: 52,000lbs
- Max Payload: 44,000lbs

Disclaimer: The specifications provided in this spec sheet are general and may vary in the delivered unit. It is advisable to verify specifications with your salesman at the time of the order to ensure accuracy.

***tcgequip.com***

***Phone: 251-725-0130 | Email: theconnergrouppm.me***

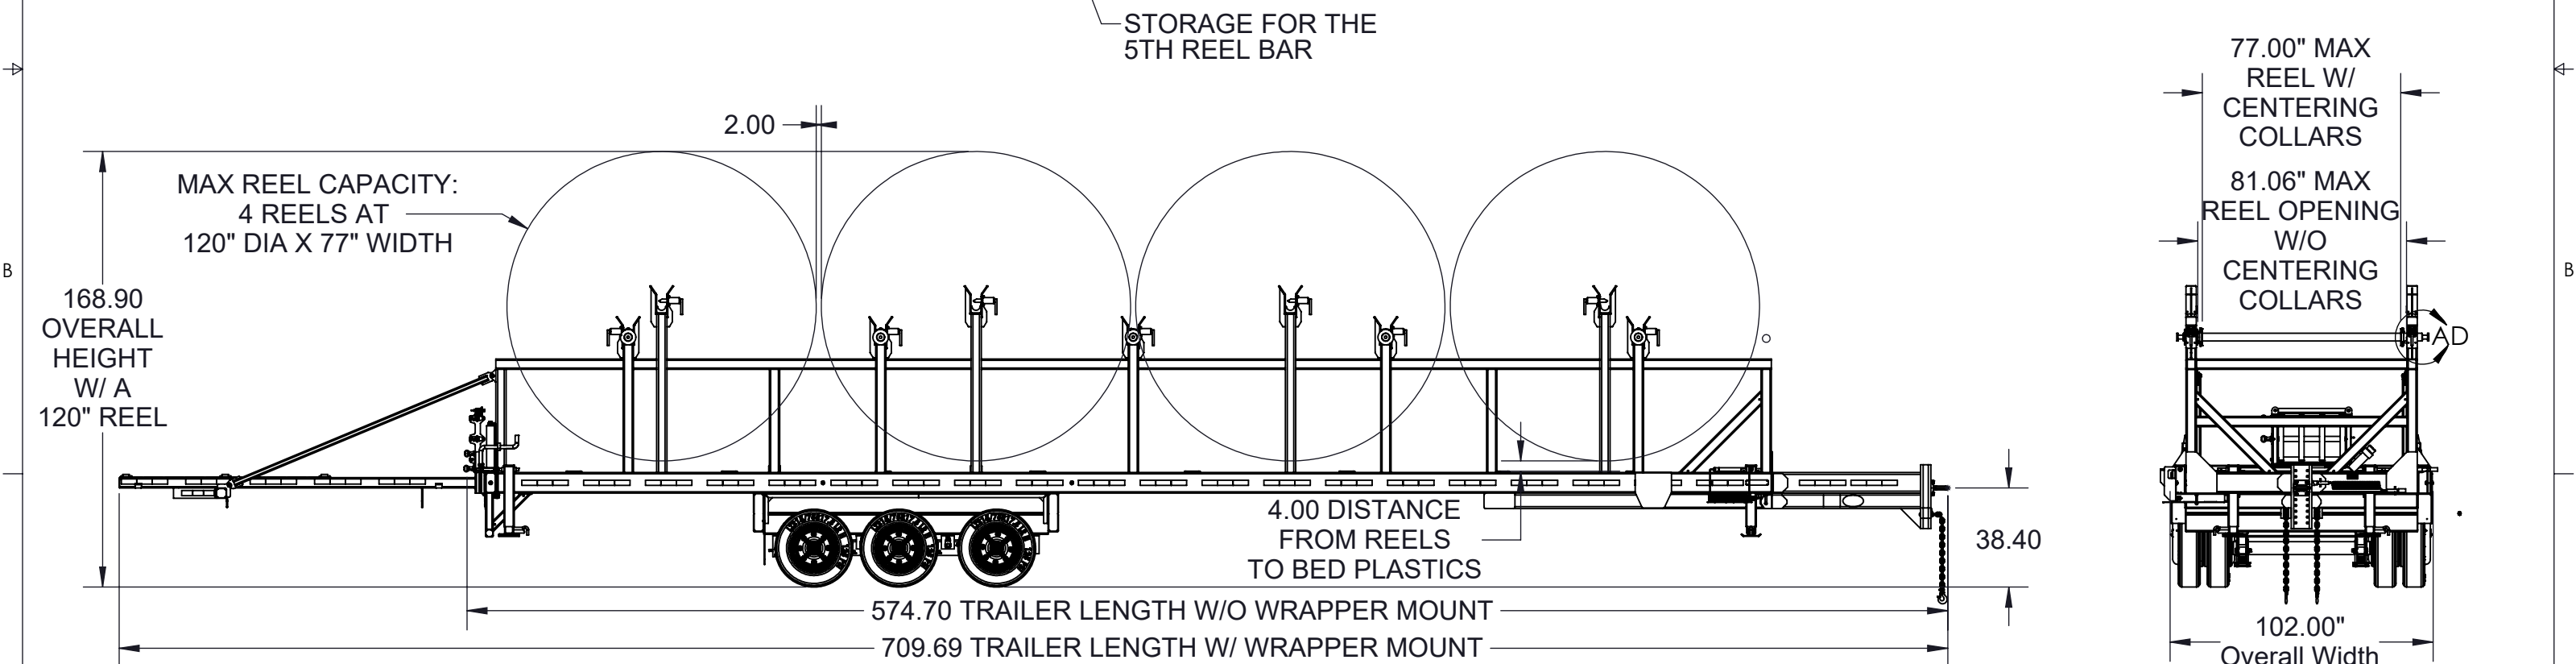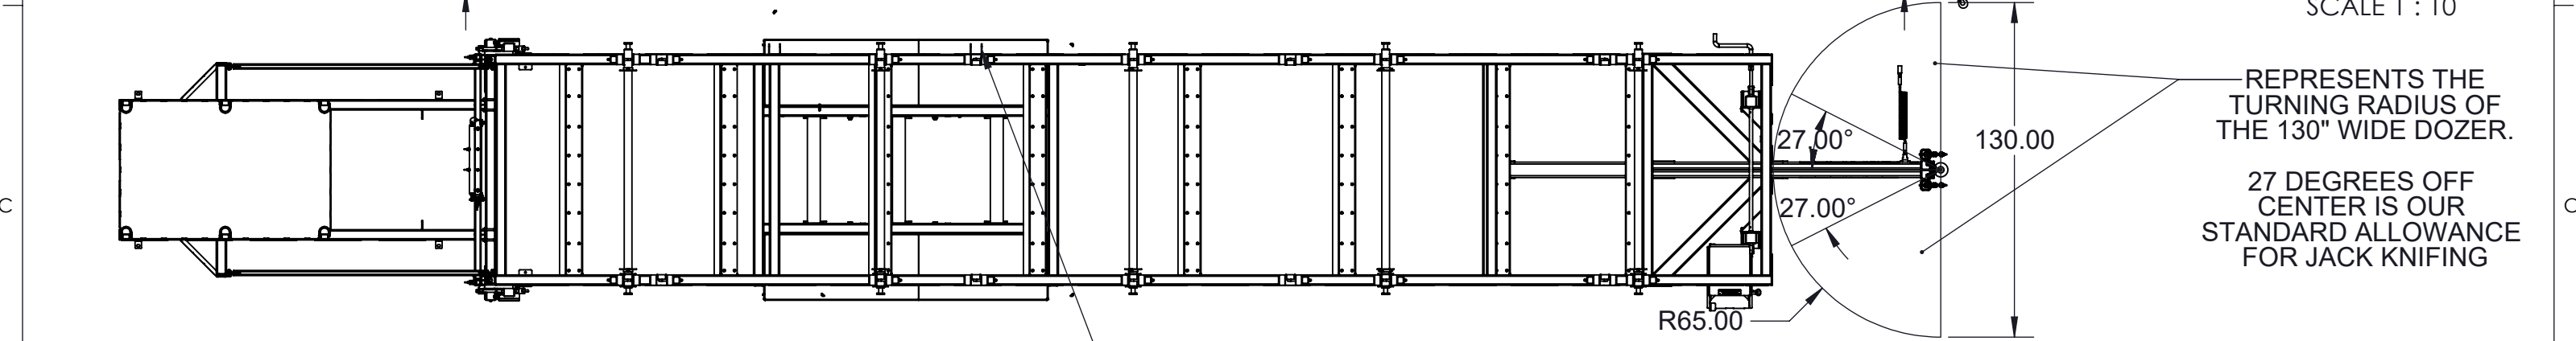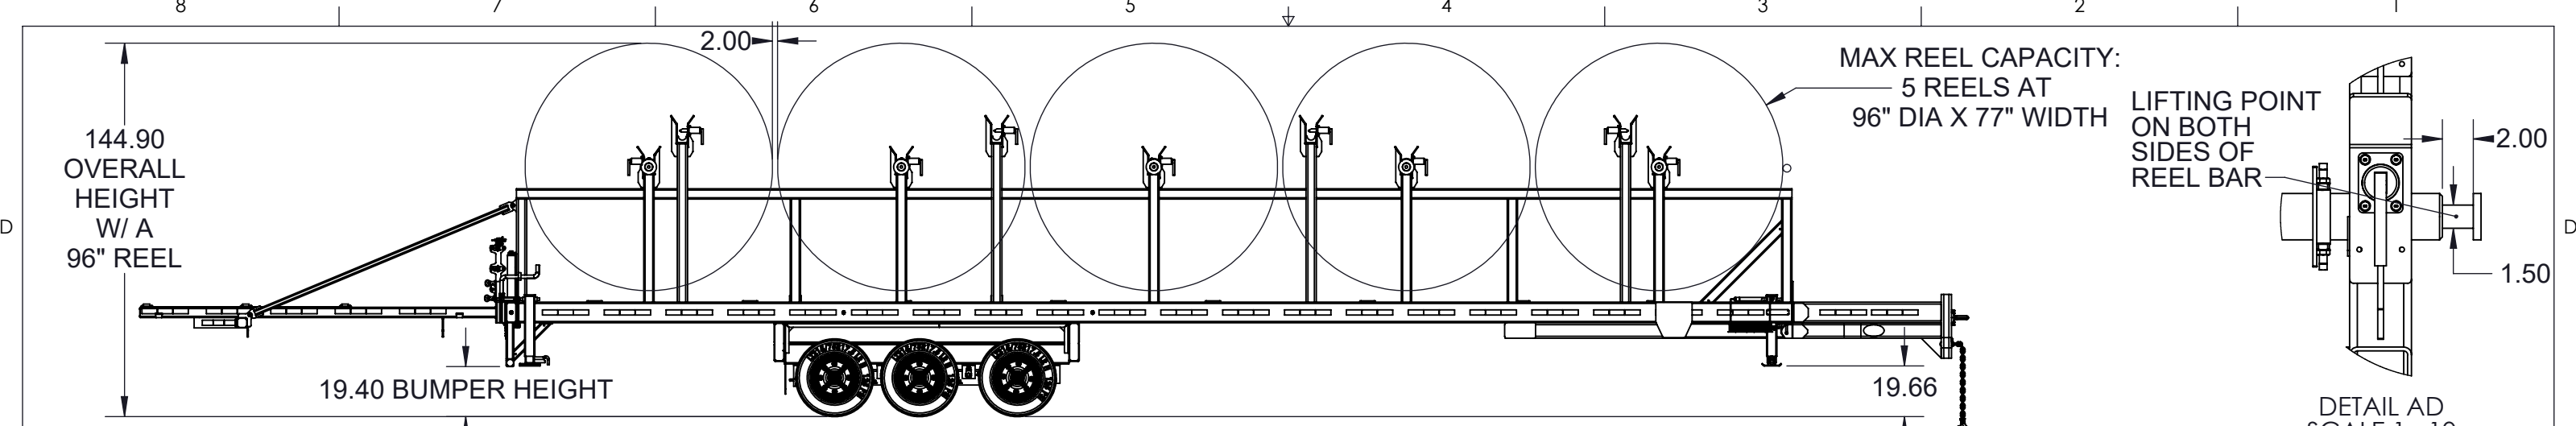

**NOTE: LARGE REELS MAY EXCEED 13' 6" ROAD HEIGHT LIMITS**

**UNLESS OTHERWISE SPECIFIED:**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ReelStrong, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ReelStrong, Inc. IS PROHIBITED.

DIMENSIONS ARE IN INCHES  
TOLERANCE LIMITS  
ANGULAR = 1.0  
DECIMAL .X = 0.060  
DECIMAL .XX = 0.010  
DECIMAL .XXX = 0.005



MATERIAL:

FINISH:

APPRX WEIGHT: LBS


SHEET 1 OF 2

DRAWING NOT TO SCALE

TITLE: MRST4-5-44 (v5)

DATE: 8/8/2025

PART NO.: B-560-000000

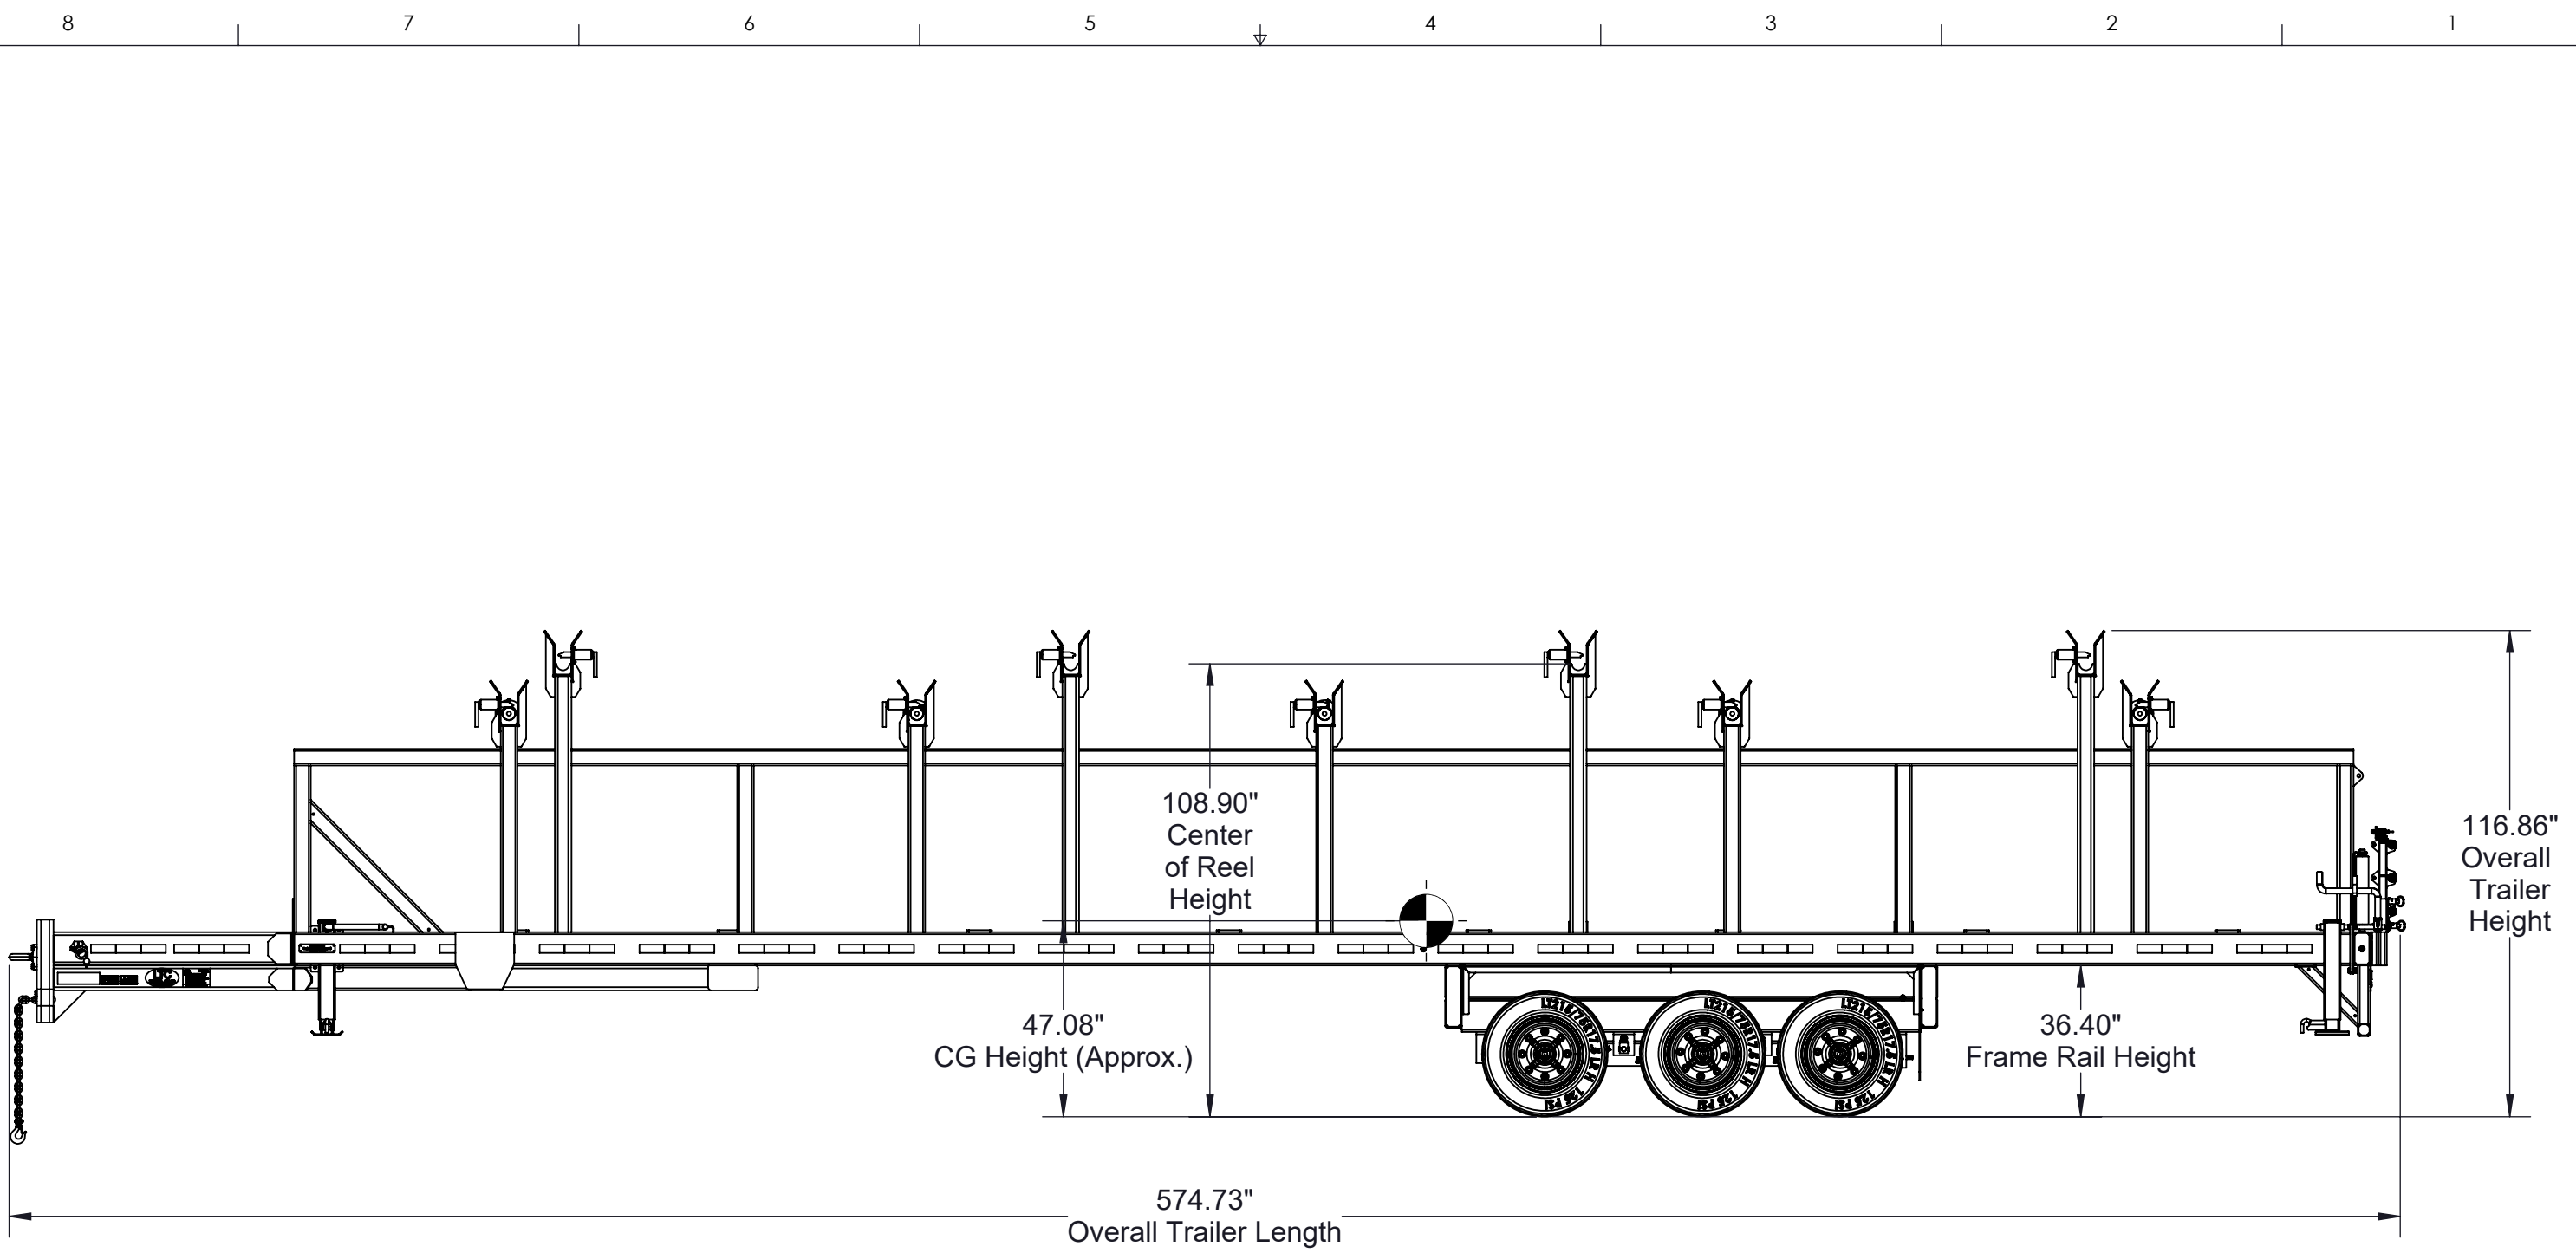

**UNLESS OTHERWISE SPECIFIED:**

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ReelStrong, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ReelStrong, Inc. IS PROHIBITED.

DIMENSIONS ARE IN INCHES  
 TOLERANCE LIMITS  
 ANGULAR = 1.0  
 DECIMAL .X = 0.060  
 DECIMAL .XX = 0.010  
 DECIMAL .XXX = 0.005



MATERIAL:

FINISH:

APPRX WEIGHT:  
 LBS

SHEET 2 OF 2

**DRAWING NOT TO SCALE**

TITLE:  
**MRST4-5-44 (v5)**

DATE: 8/8/2025

PART NO.: B-560-000000