THE CONNER GROUP

DTAX2 SERIES

TELESCOPIC ARTICULATING

AVAILABLE NATIONWIDE

MAX. WORKING HEIGHT	MAX. SIDE REACH	MAX. BASKET CAPACITY	BASKET ROTATION
49 ft	30 ft	400 lb	180 degrees





SERIES HIGHLIGHTS

LIFT TYPE	Telescopic articulating, personnel
WORKING HEIGHT	Up to 49 ft
SIDE REACH	Up to 30 ft
BASKET CAPACITY	Up to 400 lb
BASKET ROTATOR	180 degrees
BODY OPTIONS	Available for use with 9-ft body
INSULATION	Insulated (DTAX2) or non-insulated (DTAX2S)

COMPACT DESIGN & STOWING

Negative boom angle allows for ground level access from the basket.

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.

THE CONNER GROUP


DTAX2 SERIES

SPECIFICATIONS, REACH & FEATURES

MODEL SPECIFICATIONS

SPECIFICATION	DTAX2-44	DTAX2-42	DTAX2-39
Working Height	49 ft	47 ft	44 ft
Side Reach	30 ft	28 ft	28 ft
Approx. Stowed Travel Height	10 ft	10 ft	10 ft
Height to Bottom of Platform	44 ft	42 ft	39 ft
Basket Capacity	350 lb	400 lb	400 lb
Approx. Lift Weight	2,585 lb	2,450 lb	2,235 lb
Articulating Arm Travel	-5° to 81°	-5° to 81°	-5° to 81°
Main Boom Travel	-25° to 75°	-25° to 75°	-25° to 75°
Extension Travel	122.5 in	110.5 in	110.5 in

REACH DIAGRAM

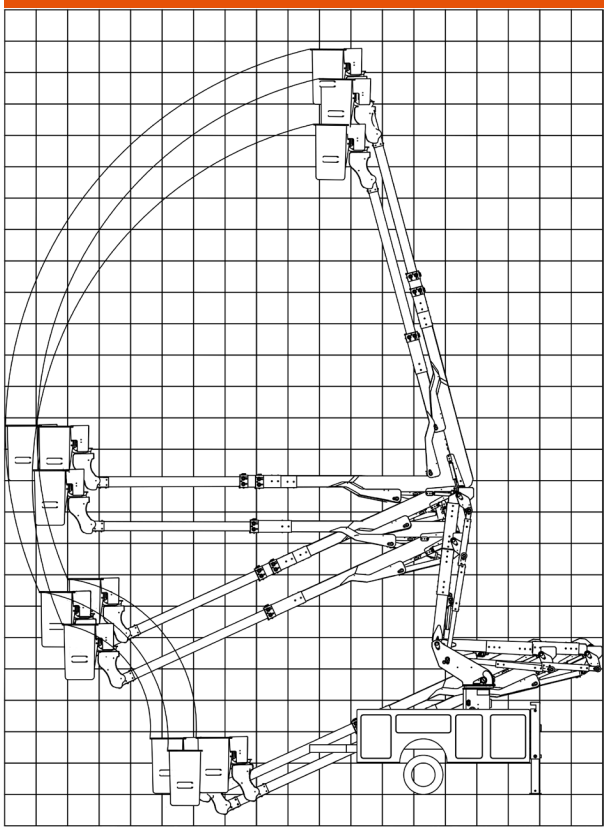

STANDARD

Controls: Proportional controls; lower controls with override located at the turntable; engine start/stop from the basket; individual control levers.

Hydraulic system: Rated pressure is 2200 PSI; operating pressure is 2000 PSI; open center hydraulic system; 180° rotating basket.

Mechanical system: Telescoping and articulating boom action; offset main boom reduces travel height; shear ball rotation driven; fully enclosed worm gear box; non-continuous rotation; insulated extension boom 46kv (DTAX2); 24 x 24 x 42-in basket; 110v outlet at upper controls (DTAX2S).

OPTIONAL

Single hand joystick upper control; outrigger or torsion bars; 12v D.C. backup; fixed basket position (side or end); basket offered in various sizes and configurations; basket liner 50kv (DTAX2); main boom fiberglass insert (DTAX2); chassis isolator art boom fiberglass insert (DTAX2); continuous rotation; tool trays of various sizes; basket and control cover; upper and lower hydraulic tool circuits; tail shelf with walkup.

CHASSIS REQUIREMENTS

MINIMUM GVWR	15,000 lb (DTAX2-39/42); 19,000 lb (DTAX2-44)
MIN. CAB-TO-AXLE	60-84 in (DTAX2-39); 84 in (DTAX2-42/44)

INSULATED / NON-INSULATED

DTAX2: insulated (Category C or D)
DTAX2S: non-insulated

Office 251-725-0130 | chris@tcgequip.com | tcgequip.com