THE CONNER GROUP


6 X 10 FIBER OPTIC

SPLICING TRAILER


AVAILABLE NATIONWIDE

TRAILER SIZE	INTERIOR HEIGHT	GENERATOR	ELECTRICAL
6 x 10 ft	7 ft	9.5 kW	50 amp



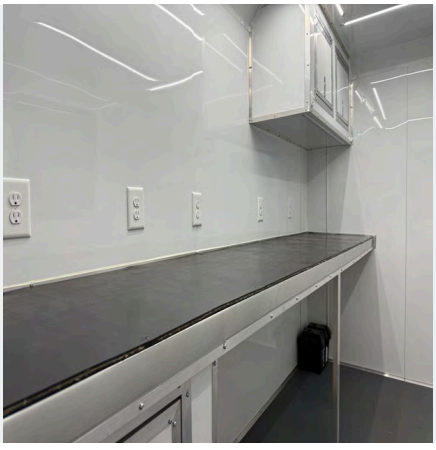

WORKBENCH & STORAGE

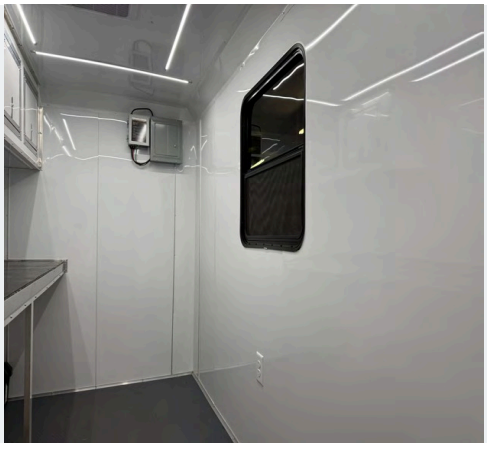

FINISHED INTERIOR



REAR ARROW LIGHTS

Rear arrow lights are standard equipment.

TRAILER SPECIFICATIONS

6 X 10 FIBER OPTIC SPLICING TRAILER

TRAILER & WORKSPACE

PACKAGE	6 x 10 tandem-axle white trailer; Diamond Package
CONSTRUCTION	Flat front; .080 white Poly-Core; ATP fenders
INTERIOR	7-ft height; insulated metal walls and ceiling
ENTRY DOOR	32 in. W x 75 in. H RV door; bar lock; 15 x 30-in. window
SPLICING DOOR	16 x 18 in., with brushes
SIDE WINDOW	30 x 30 in., passenger side
FLOORING	Rubber coin
WORKBENCH	10 ft x 18 in.; 3/4-in. rubber cutting mat
CABINETS	2-ft base cabinet; 4-ft upper cabinet
SPARE TIRE	Included; in-floor storage compartment

POWER & OPERATING DETAILS

CLIMATE	Air conditioning with heat strip
ELECTRICAL	50A package; motor-base plug; 12V battery and inverter
RECEPTACLES	Four driver-side outlets; heater GFCI below passenger window
LIGHTING	Amber strobes; two 10-in. race lights; LED and rear arrow lights
GENERATOR	9.5 kW / 9,500W, dual fuel
FUEL TANK	6.6 gallons
STARTING	Push-button and key-fob start
PLATFORM	36 x 36 x 36 in. on 66-in. TTT; slide tray and cover

Rear arrow lights are standard equipment.